



Rotogravure Printing Press

MODEL: DGA-OT-SERIES

FOR DECORATIVE PRINTING

(WOOD GRAIN. TEXTILE. WALL PAPER. FLOOR COVERING)



ROTARY TYPE
3 IMPRESSION ROLL



REGISTER
CONTROLLER



TOUCH SCREEN

DHC MACHINERY CO., LTD.

HEAD OFFICE & MAIN FACTORY : #121-1, DANG JEONG DONG, KUNPO-CITY, KYUNG KI-DO, KOREA
TEL:82-31-429-4420~1 / FAX:82-31-457-8666 / Email:donghyung@netsgo.com / <http://www.donghyung.com>



Rotogravure Printing Press


SPECIFICATIONS

Description		Standard
Kind of Web		Paper(80~250gr/m ²)
Nos of Color		2~8 Colors
Guide Roll Width		1200mm~1800mm
Machine Speed		20~200m/min
Machine Control System		Fully Automatic Control Type(Recomendable Printing Speed:150m/min)
Unwinder	Type Reel Dia Shaft	2 Shafts Turret Type φ1000mm~1200mm Air Fix Type
Infeeding Unit		Synchronized Control Type with D.C Motor (AC Vector Motor)
Printing Unit	Cylinder Size Chucking Drying Register	Dia(φ250~550mm)~Length(700~1750mm) Pneumatic Shaftless Locked Type Heat Exchanging Type with Steam Converter or Electric Heater All Automatic with Color Controller and Compensating Roll Pre-setting Device
Outfeeding Unit		Synchronized Control Type with D.C Motor (AC Vector Motor)
Rewinder	Type Reel Dia Shaft Tension Control	2 Shafts Turret Type φ1000mm~1200mm Air Fix Type D.C Motor Control System (AC Vector Motor)

※ NOTE: Above technical specifications may be changed according to customer's requests.

規格證明書

項目		標準
印刷材料		紙張(80~250克/平方米)
色數		2~8色
導輓寬度		1200mm~1800mm
機器速度		20~200米/分
機器控制系統		全自動控制方式
放卷部份	方式 放卷輓直徑 軸心	2 軸塔式 φ1000mm~φ1200mm 空氣固定方式
給紙部份		由D.C馬達的同期控制方式 (AC Vector Motor)
印刷部份	氣缸尺寸 CHUCKING 烘乾 調節器	直徑 φ 250~550mm 長度 φ 700~1750mm 氣動無軸固定方式 由蒸氣對流式煖爐的熱交換方式 由色彩控制機的全自動和補整輓豫調裝置
收紙部份		由D.C馬達的同期控制方式 (AC Vector Motor)
收卷部份	方式 收卷輓直徑 軸心 張力控制	2 軸塔式 φ1000mm~φ1200mm 空氣固定方式 D.C馬達控制系統 (AC Vector Motor)

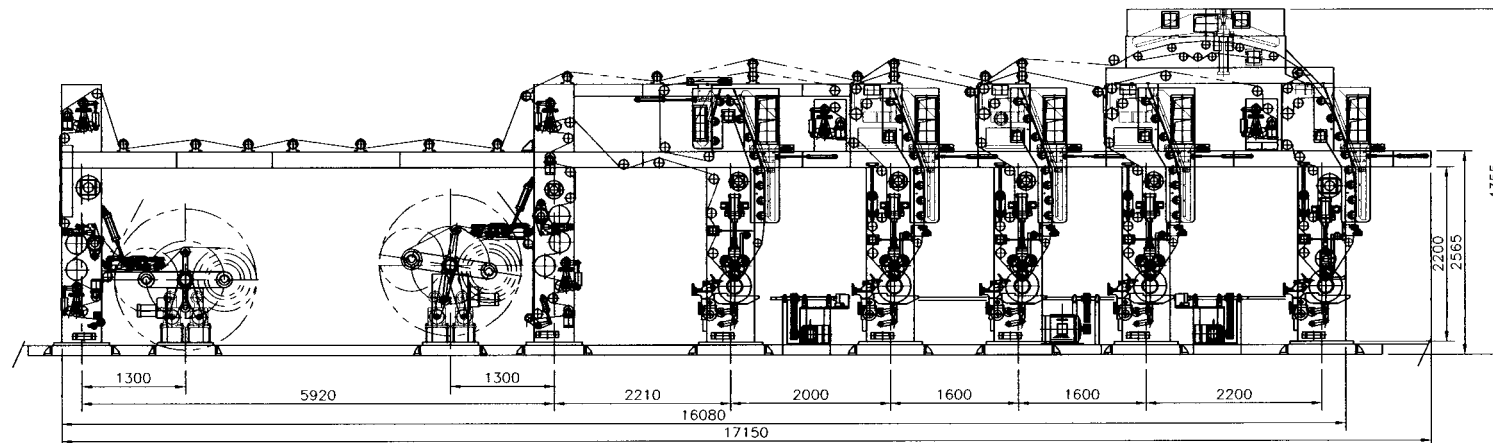

DHC MACHINERY CO., LTD.

HEAD OFFICE & MAIN FACTORY : #121-1, DANG JEONG DONG, KUNPO-CITY, KYUNG KI-DO, KOREA
TEL:82-31-429-4420~1 / FAX:82-31-457-8666 / Email:donghyung@netsgo.com / http://www.donghyung.com